
Collamat® 3600




The multifunctional. With the Collamat® 3600 labelling system you get a perfect solution for any standard application. It is compact, space-saying and leasy to operate.

The typical Collamat® modularity allows you to configure the system optimal to your production requirements. Designed for semi or fully automated applications the Collamat® 3600 offers a great solution for smaller productions with demands to long lasting functionality and reliability.



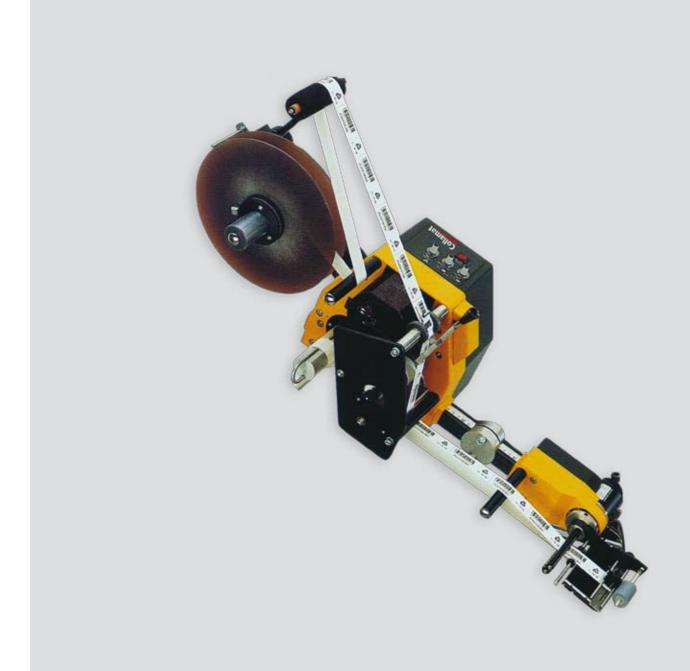

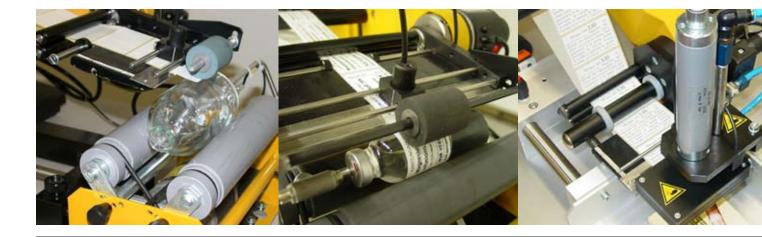

FEATURES

- Flexibility Wide application range due to the availability of various applicators for specific products
- Collamat® design Controller, drive unit, rewinder, and operator panel integrated in one space-saving unit
- Expandable Prepared for communication and installation of printers, hot stamps or ink jets
- Modularity Easy adaptation to new applications
 Easy operation Settings can easily be changed by 3 potentiometers
- Modular rail mounting Easy plug-in expansion for options
- Fast set up Set parameters for label scanner, predispensing, and application speed – and you are ready to work

TECHNICAL DATA C3610 C3620

Passing width of label web:	95 mm (3 3/4 in.) 160 mm (6 1/3 in.)
Feeding speed:	3 - 20 m/min (10 - 65 ft/min)
Labelling accuracy:	± 1 mm (1/25 in.)
Label length:	10 - 2000 mm (10/25 - 78 3/4 in.)
Max label reel diameter:	350 mm (14 in.)
Rewinder:	Integrated in traction unit
Drive:	2 phase stepper motor
Control:	Integrated in traction unit. 16 bit microprocessor.
Settings by potentiometer:	Variable speed adjustment, label scanner sensitivity,
	pre-dispensing
Applicator:	Optional: Fix, spring mounted, magnet or others
Mounting:	Left or right
Options:	According to separate list
Voltage:	115–230 V / 50–60 Hz / 110 VA
Approbation:	CE/Gost

